

# Analog Simulcast over IP: Integrated Voice & Paging Solution



**TaitNet AS-IP analog simulcast networks are IP-based analog systems that are specifically designed to provide conventional simulcast analog communications over wide geographic areas.**

**AS-IP networks can stand-alone, or an analog simulcast overlay can be added to new or existing Tait P25 networks, for analog voice and paging applications.**

TaitNet AS-IP networks deliver a lower total cost of ownership by providing advanced functionality with less equipment, better coverage on a single frequency and investment protection for your future needs.

#### **Advanced Functionality**

The TaitNet AS-IP system architecture is composed of a master base station with multiple satellites to form a channel. A console gateway can be added to connect to a dispatch solution. This system can be improved with the Tait Enable suite applications or other standard 3rd party analog equipment.

#### **Integrated Equipment**

Using significantly less equipment than a typical analog simulcast network, TaitNet AS-IP incorporates voting and site control into the cleverly designed TB9400 base station for efficiency and increased resiliency.

#### **Better Coverage**

Simulcast transmission provides a means of achieving wide-area coverage with multiple transmitters utilizing a single frequency for voice and paging solutions.

#### **Investment Protection**

The Tait AS-IP network portfolio is based on the latest 9400 Tait products, providing a compact solution that can grow with your customer's needs for both Analog and P25 solutions.

#### **Easy Migration Path**


The TaitNet AS-IP network utilizes the latest Tait 9400 products that are also utilized in Tait P25 networks for Phase 1 and Phase 2 operation. This allows for full re-use of our AS-IP hardware platform and licences when customers are ready to migrate to a P25 solution.





**TaitNet AS-IP Analog Simulcast overlay on P25 trunking networks.**

AS-IP trunking can complement a P25 network by adding an analog simulcast overlay to a P25 trunking solution, allowing analog voice and paging applications or legacy analog radio users such as mutual aid channels.

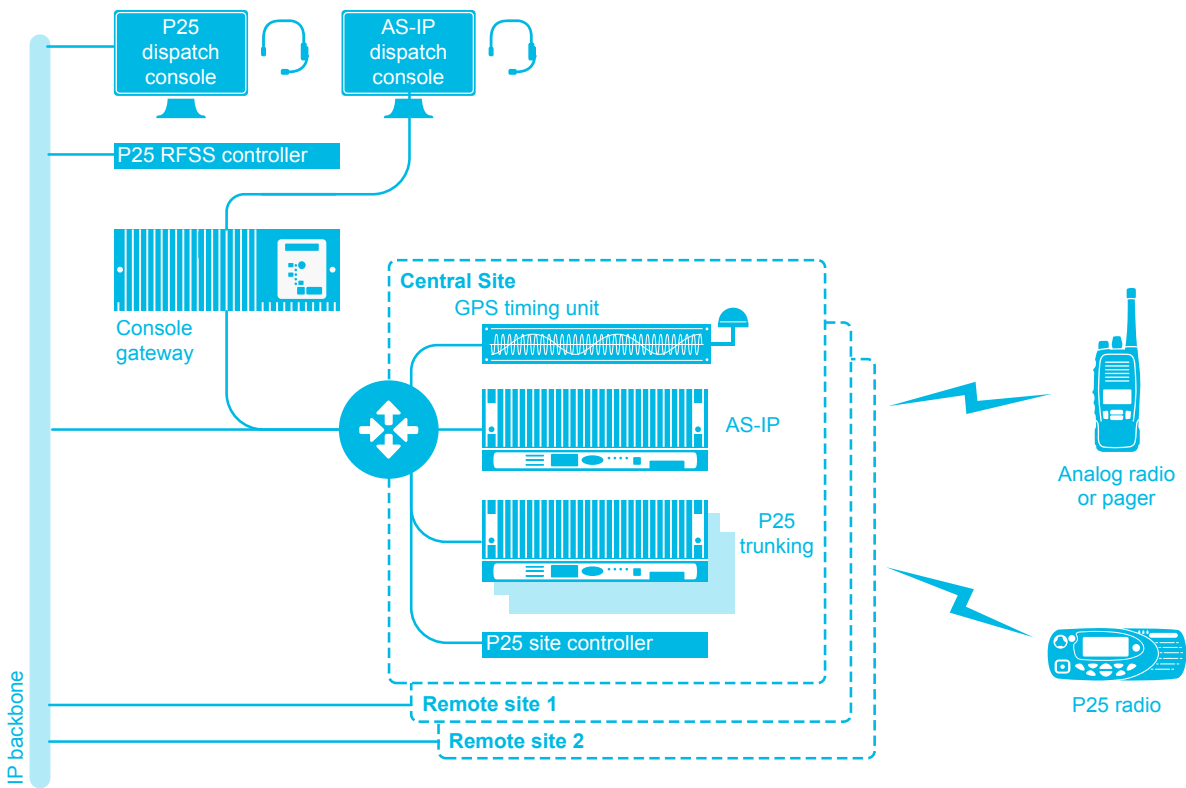

While Tait has taken every care to ensure that the information and contents are correct and up-to-date at the time of printing, Tait does not guarantee the accuracy and correctness of the information. Tait cannot be held liable or responsible for errors or omissions in the contents of this document. All

information is given without any warranties or representations, expressed or implied. The word "Tait" and the Tait logo are trademarks of Tait International Limited. Tait\_F\_AS-IP\_v3\_2016.